

SPECIFICATIONS

Excess Flow Valve de32 EFV-SV SDR11



Service conditions

Maximum working pressure: 10 bar (145 psi)
 Temperature range: -20°C to +40°C
 Shut off: at 4 bar flow velocity 25 m/s
 (Standard configuration)


Tested in according to EN 1555-4

Materials of construction

Valve body	PE100
Closing membrane	Acetal (POM)
Counter weight	Acetal (POM)
Stem	Stainless steel/POM
Seal	Nitrile / Elastolan
Closing cap	Acetal (POM)

Dimensions

Total Length	mm	306
Total Height		206
Total Weight	kg	1,1

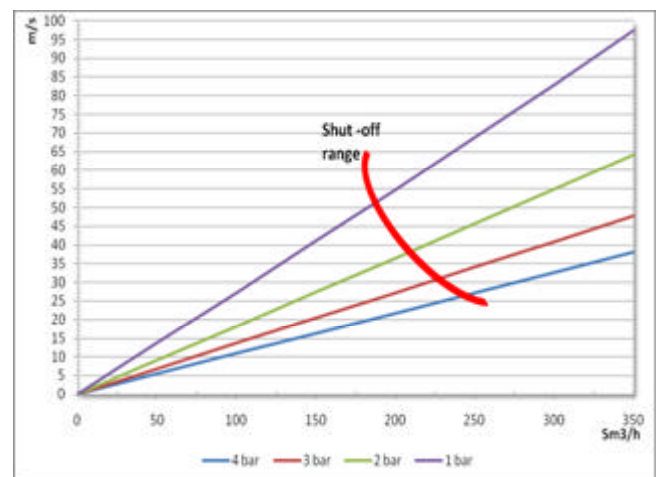

Fluma AS

P.O. Box 8034
 4068 Stavanger
 Norway

Telephone: +47 51 87 47 01
 E-mail: info@fluma.no
www.fluma.no